

AN-10028E


Framing Nailers

28 Degree Strip Framing Nailer

APACH
BUILDING FUTURES



AN-10028E

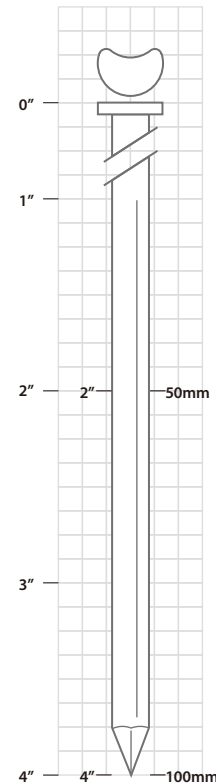

▲ Features

- 360° Adjustable Exhaust Deflector
- Depth-of-Drive Adjustment
- Agressive Toe-Nailing Teeth for Slip-Free Grip when Fastening
- Removable No-Mar Rubber Tip
- Dedicated Sequential or Bump Fire Trigger - for Enhanced Safety and Durability
- Top Load Magazine
- Dry-Fire Lock

▲ Applications

- Roofing, Carpentry
- Framing, Joiner
- Door, Window, Trimming, Picture Frames, Building Components
- Packaging, Crating, Pallets
- Industrial, Pre-Fabricated Housing

▲ Fasteners

- 28° Clipped Head Wire / Paper Collated Strip Nails
- Ø .113 - .161" / 2.87 - 4.1 mm

▲ Tool Specifications

Weight	Dimensions (L x W x H)	Operating Pressure	Lead Capacity
3.64 kgs	495 x 117 x 376 mm	5 - 7 kg / cm ²	60 nails
8 lbs	19.5" x 4.6" x 14.8"	70 - 100 psi	60 nails

APACH INDUSTRIAL CO., LTD.

176 Industrial 9th Rd., Tali Dist., Taichung City, Taiwan 41280
Tel +886 4 2491 5576 Fax +886 4 2491 5580
www.apach.com.tw

